


Revolve Valves

Investment Casting “Y” Type 2/2 Way
Pneumatic Cylinder Operater

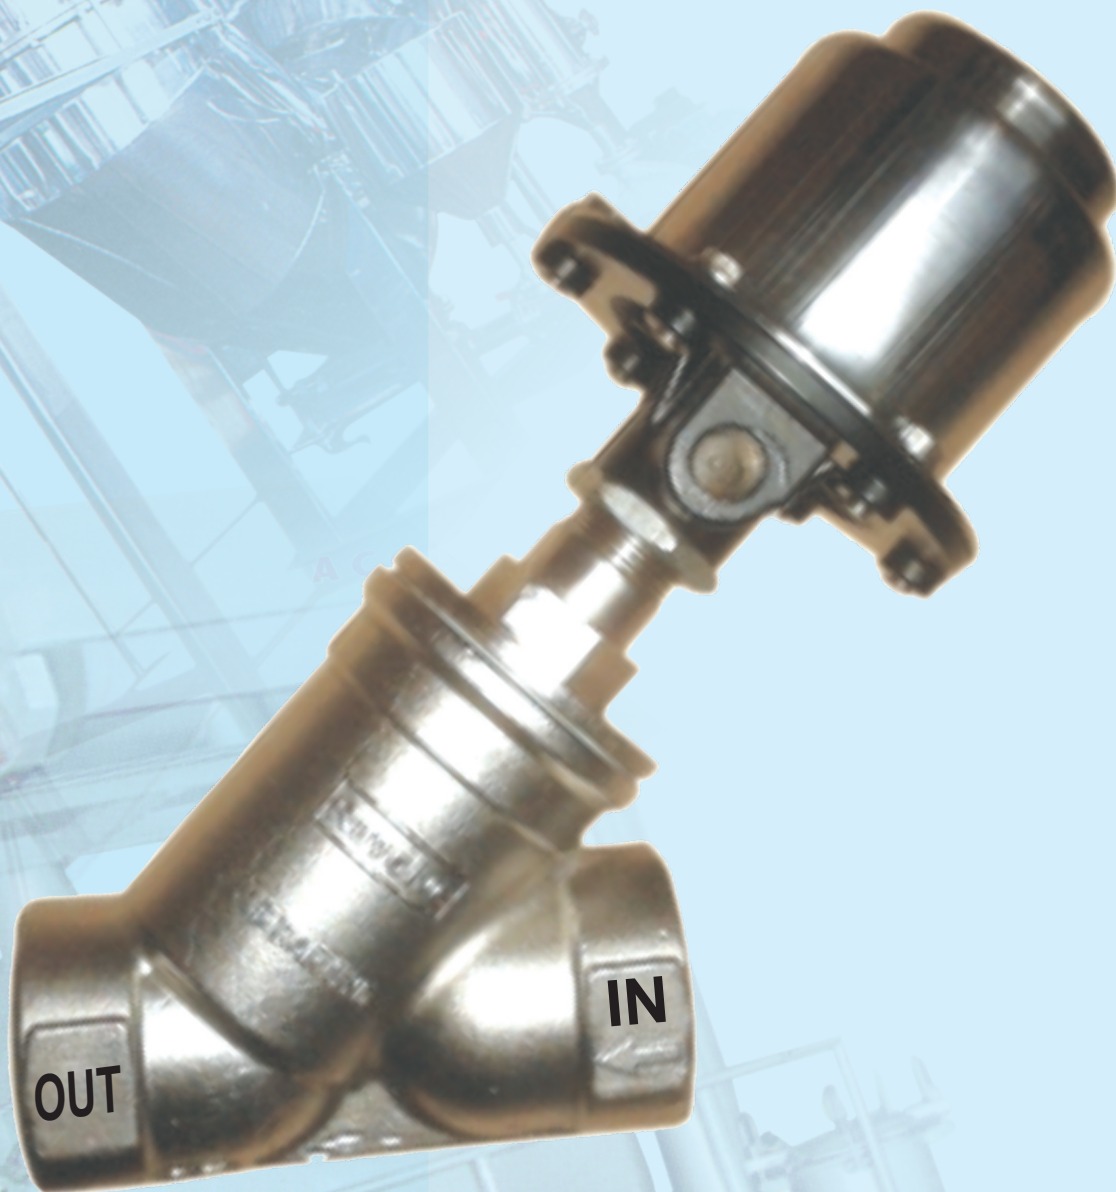


WE CONTROL THE FLUID

- Compact Design.
- High Temperature Capacity
- High Performance.
- 180° C/12 Bar Max. Pressure

Investment Casting “Y” Type 2/2 Way Pneumatic Cylinder Operated



SCREWED ENDS



FLANGED ENDS

Temperature

Upto 155°C on Continuous Process & 185°C intermittent Process.

SPECIFICATIONS:

Model : RV – FRV

Valve Design : 2/2 Way Pneumatic Cylinder Operated Angle Type – Y Type Control Valves

Actuator : Single Acting (Spring Return) N/O, N/C

Size Range : 1/2" to 2"

MATERIAL OF CONSTRUCTION :

Body / Bonnet / : CF 8 (S.S. 304), CF 3 (S.S. 304 L),
Plug : CF 8 M (S.S. 316), CF 3 M (S.S. 316 L),
CAST STEEL (WCB 216)

Stem : S.S. 316, S.S. 304

Gland Seal : PTFE V Seals Backed By Graphite Wiper Seal

Seat : PTFE

Actuator Housing : Stainless Steel 304

Spring : Spring Steel

Pressure Rating : PN 10 - Up To 10 Bar

Temperature Rating : Up To 180° C

End Connection : Screwed End / Flanged Ends Drilled To ANSI 150 #

Application : Air, Gas, Water Coolant, Hot Fluids Oil, Steam, etc.

Mfg. By :

Revolve Valves

C/4, Archana Estate, Part-II, Near Rakhiyal Post Office,
Rakhiyal, Ahmedabad-380023 (GUJARAT) INDIA. Tele Fax : 079 - 22747906
Mobile : 9879616686, 98250 78605 • E-mail : revolvevalves@yahoo.in